

Part Number SOI 50_1_300 150mm, Customer Part: SOI 50_1_300 150mmr Customer IceMOS Technology

Category		Parameter	Specification	Measurement Method
OverallWafer	1.0	Diameter	150.00 +/- 0.20 mm	
	2.0	Primary Flat Orientation	{110} +/- 1 degree	Customer supplied material
	3.0	Primary Flat Length	57.50 +/- 2.50 mm	Customer supplied material
	4.0	Secondary Flat Orientation	none or SEMI Standard	Customer supplied material
	5.0	Overall Thickness	351.00 +/- 7.00 μ m	ADE, 100%
	6.0	Total Thickness Variation (TTV)	<3.00 μ m	Guaranteed by Process
	7.0	Bow	<60.00 μ m	ADE to ASTM F534, 100%
	8.0	Warp	<60.00 μ m	ADE to ASTM F534, 100%
	9.0	Edge Chips	0	Bright Light, 100%
	10.0	Edge Exclusion	5mm	
HandleSilicon	11.0	Handle Growth Method	CZ	Customer supplied material
	12.0	Handle Orientation	{100} +/- 0.5 degree	Customer supplied material
	13.0	Handle Thickness	300.00 +/- 5.00 μ m	ADE, 100%
	14.0	Handle Doping Type	P	Customer supplied material
	15.0	Handle Dopant	Boron	Customer supplied material
	16.0	Handle Resistivity	0.013-0.02 Ohm-cm	Customer supplied material
	17.0	Backside Finish	Polished with oxide and lasermark	Guaranteed by process
BuriedOxide	18.0	Oxide Type	Thermal	
	19.0	Oxide Thickness	10,000.00 +/- 1,000.00 A	Nanospec centre point, 4%
	20.0	Oxide formed on	Device and/or Handle	
DeviceSilicon	21.0	Device Growth Method	CZ	Customer supplied material
	22.0	Device Orientation	{100} +/- 0.5 degree	Customer supplied material
	23.0	Nominal Thickness	50.00 +/- 1.00 μ m	ADE single point, 100% (note3)
	24.0	Distance to device silicon edge from wafer edge	< 2mm	Typical by Process
	25.0	Device Doping Type	P	Customer supplied material
	26.0	Device Dopant	Boron	Customer supplied material
	27.0	Device Resistivity	0.013-0.02 Ohm-cm	Customer supplied material
	28.0	Top surface Surface Average roughness, Ra	<0.5nm	Guaranteed by process
	29.0	Surface Voids	None	Bright Light, 100% (note2)
	30.0	Haze	None	Bright Light, 100% (note2)

Part Number	SOI 50_1_300 150mm, Customer Part: SOI 50_1_300 150mm	Customer	IceMOS Technology
-------------	---	----------	-------------------

Category	Parameter	Specification	Measurement Method
----------	-----------	---------------	--------------------


Shipping Details	Wafer per box :	Max 25	
	Packaging :	Taped Polypropylene Wafer Box Empak, Ultrapak, 150.00mm Antistatic Double Bagging	
	Lot Shipment Data	Device Thickness Bow / Warp Data Handle and SOI Thickness	

Explanatory Notes

1. Microscope inspection performed using microscope scan as below. 5x objective.

2. All bright light inspections performed exclude all wafer area outside the edge exclusion defined in Overall Wafer, Edge Exclusion. High intensity bright lamp inspection as per ASTM F523.

3. 9 point measurement are as shown in the diagram below:

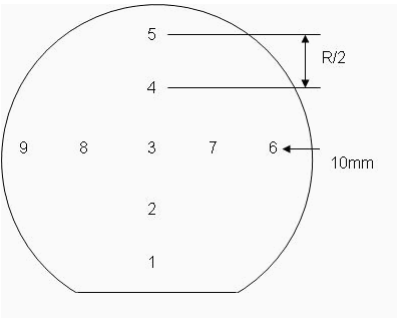

Additional Information